

## UC<sup>FIBRE™</sup> IT N LSHF-FR ES9 2.8 2


### ES9 tight buffer, 2 fibres, aramid yarn, FireRes<sup>®</sup> sheath

DIN/VDE J-V(ZN)H 2

NO AXAI-I/P-28

FR COPZLK

DK

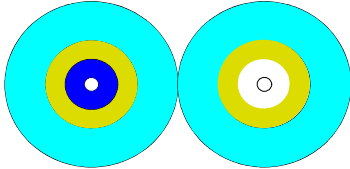

### Application and Installation

Interconnect cabling

This cable features Draka's ES9 easy strippable tight buffer

LAN horizontal cabling

Patch cord cable, very well suited for mounting of SC connectors

Short distance data-, control- and video transmission

Internal wiring

### Standards

EN 187 000

IEC 60794-2

IEC 60794-2-10

ISO 11801 2<sup>nd</sup> edition

EN 50 173-1

### Construction

Fibre	2 improved tightly buffered fibres 900 µm ± 50 µm.	
Fibre colours	Fibre 1	Natural
	Fibre 2	Blue
Strength member	Ultra high modulus aramid yarns	
Sheath	LSHF-FR fire retardant, UV stabilised sheathing material EN 50290-2-27	
	Cable with SM fibres	Yellow, RAL 1021
	Cable with M5 fibres	Orange, RAL 2303
	Cable with M6 fibres	Grey, RAL 7037
	Cable with OM3 and OM4 fibres	Aqua, RAL 6027

### Fire rating

IEC 60332-1-2	Single vertical wire test,
IEC 60332-3-24 = IEC 332-3C	Vertically-mounted bunched wires and cables
IEC 60754-1	No halogens
IEC 60754-2	No acid matters
IEC 61034-2	No dense smoke

Note: The Draka policy of continuous improvement may cause in changed specifications without prior notice

## UC<sup>FIBRE™</sup> IT N LSHF-FR ES9 2.8 2

### Heat of combustion

315 MJ/km	0.1 KWh/m
-----------	-----------

### Physical properties

IEC 60794-1-2

Nominal dimensions	-	2.8 mm x 5.7 mm
Nominal weight	-	16 kg/km
Tensile strength (dynamic)	E1	600 N
Tensile strength (permanent)	E1	300 N
Compressive strength (crush)	E3	6000 N
Impact	E4	5 Nm; R = 12.5 mm
Torsion	E7	5 cycles ± 1 turn
Min. Bending radius	E11	R = 20 mm
<i>For version with BendBright<sup>XS</sup> fibre:</i> Min. Bending radius	E11	R = 7.5 mm R = 15 mm, 6 turns around a mandrel ø 30 mm (maximum attenuation increase ≤ 0.02 dB at 1550 nm). Maximum attenuation increase for R = 10 mm 0.1 dB/turn at 1550 nm. Maximum attenuation increase for R = 7.5 mm 0.5 dB/turn at 1550 nm.
Temperature range	F1	Operation and installation: -40°C to 70°C. Storage: -40°C to 70°C

### Product codes – ordering information

Item No.	Fibre count	Product code	Fibre type	Fibre data sheet
1018600	2	UCFIBRE IT N LSHF-FR ES9 2.8 2 MM52	OM2 50/125 multi mode 600/1200	C01a
1021651	2	UCFIBRE IT N LSHF-FR ES9 2.8 2 MM53	OM3 MaxCap-OM3 multi mode	C12
1021652	2	UCFIBRE IT N LSHF-FR ES9 2.8 2 MM61	OM1 62.5/125 multi mode	C02
1020476	2	UCFIBRE IT N LSHF-FR ES9 2.8 2 SM2D.P	OS2 Single mode	C18e
o. request	2	UCFIBRE IT N LSHF-FR ES9 2.8 2 SM7B	BendBright <sup>XS</sup> G.657. A2	C24

Note: The Draka policy of continuous improvement may cause in changed specifications without prior notice