


D05a-BBXS: 2 x 1.6 mm interconnect cable

Zip-cord for small form factor connectors, 600 μm tight buffer, aramid yarns, UV stabilised LSZH, BendBright^{XS} fibre
EN 50 173-1 IEC 60794-2-10

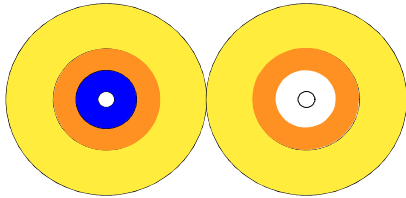

Application

Patch cord cable, very well suited for mounting of LC and MT-RJ connectors

Standards

EN 187 000
IEC 60794-2
IEC 60794-2-10
ISO 11801 2nd edition
EN 50 173-1

Construction

Fibre	Two tightly buffered BendBright ^{XS} fibre 600 $\mu\text{m} \pm 50 \mu\text{m}$.
Strength member	Ultra high modulus Aramid yarns
Sheath	LSZH fire retardant, UV stabilised sheathing material, EN 50290-2-27
Sheath colour	Yellow

Fire rating

IEC 60332-3-24 = IEC 332-3C	Vertically-mounted bunched wires and cables
IEC 60754-1	No halogens
IEC 60754-2	No acid matters
IEC 61034-2	No dense smoke

Heat of combustion

95 MJ/km	0.03 kWh/m
----------	------------

D05a-BBXS: 2 x 1.6 mm interconnect cable

Physical properties

IEC 60974-1-2

Nominal diameter	-	1.6 x 3.3 mm
Nominal weight	-	5.3 kg/km
Tensile strength (permanent)	E1	125 N
Tensile strength (dynamic)	E1	250 N
Compressive strength (crush)	E3	500 N
Impact	E4	2 Nm
Torsion	E7	5 cycles \pm 1 turn
Min. Bending radius, short term unloaded	E11	R = 7.5 mm
Min. Bending radius, installed	E11	R = 15 mm, 6 turns around a mandrel \varnothing 30 mm (maximum attenuation increase \leq 0.02 dB at 1550 nm). Maximum attenuation increase for R = 10 mm 0.1 dB/turn at 1550 nm. Maximum attenuation increase for R = 7.5 mm 0.5 dB/turn at 1550 nm.
Temperature range	F1	Operation and installation: -20°C to 70°C. Storage: -20°C to 70°C

Transmission characteristics

IEC 60793-2

General properties	Data sheet C24
Attenuation 1310 nm – 1625 nm	\leq 0.39 dB/km
Attenuation 1550 nm	\leq 0.25 dB/km